



HYDRAULIC FASTENING SYSTEMS

PP SERIES HYDRAULIC POWER PACKS


PP-ELECTRIC POWER

- 115V and 230V Models
- Two Stage Industrial Duty
- Max 10,000 PSI / 700 Bar
- 15' Remote Pendant
- Made In America



PP-AIR POWER

- 4 HP Air Motor
- Two Stage Industrial Duty
- Max 10,000 PSI / 700 Bar
- 15' Remote Pendant
- Made In America

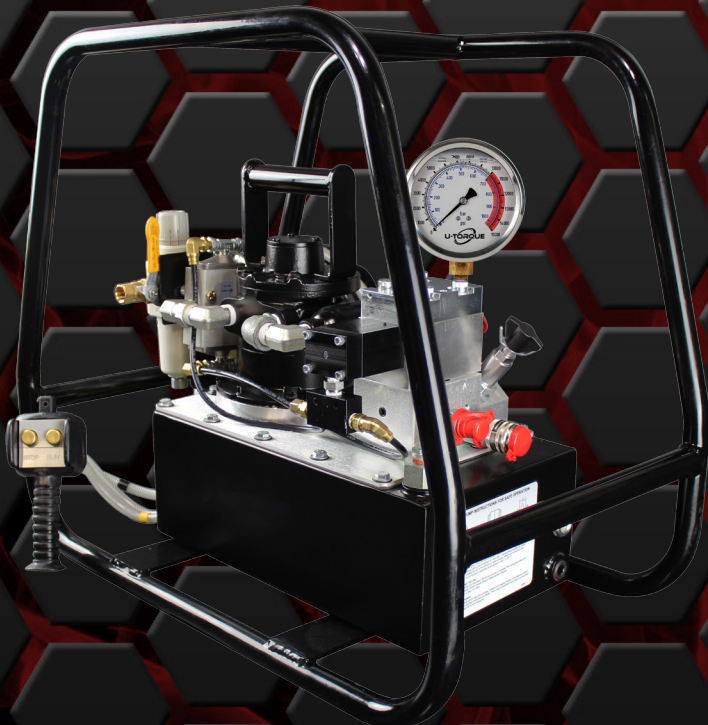

MADE IN AMERICA



SPECIFICATIONS



PP SERIES

ELECTRIC POWER PACKS

TECHNICAL DATA	PP-ELECTRIC 115V
Reservoir Capacity (gal/litre)	1.5/5.7
Valve Style	Auto Retract
Motor Specification	1.5 HP @ 115VAC Single Phase
Flow Rate @ 1,100psi	700 cu.in./min.
Flow Rate @ 10,000psi	55 cu.in./min.
Weight (lbs/kg)	74.0/33.6
AMPS	17-18

TECHNICAL DATA	PP-ELECTRIC 230V
Reservoir Capacity (gal/litre)	1.5/5.7
Valve Style	Auto Retract
Motor Specification	1.5 HP @ 230VAC Single Phase
Flow Rate @ 75 bar	11.5 litres/min.
Flow Rate @ 700 bar	.9 litres/min.
Weight (lbs/kg)	74.0/33.6
AMPS	17-18

DIMENSIONS	PP-ELECTRIC
A (in/mm)	15.0/381
B (in/mm)	8.7/221
C (in/mm)	19.0/483
D (in/mm)	5.9/150

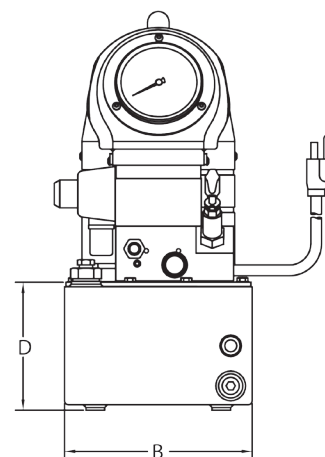
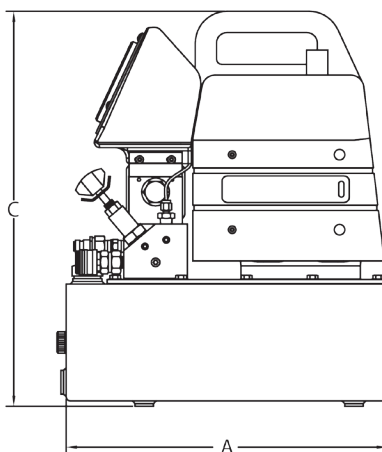


PP SERIES

AIR POWER PACKS

TECHNICAL DATA	PP-AIR
Reservoir Capacity (gal/litre)	1.5 / 5.7
Valve Style	Auto Retract
Motor Specification	4 HP @ 90 psi/ 50 cfm
Flow Rate	700 cu.in./min. @ 1,100psi
Weight (lbs/kg)	67/30.4

DIMENSIONS	PP-AIR
A (in/mm)	15.0/381
B (in/mm)	8.7/221
C (in/mm)	16.0/406
D (in/mm)	5.9/150

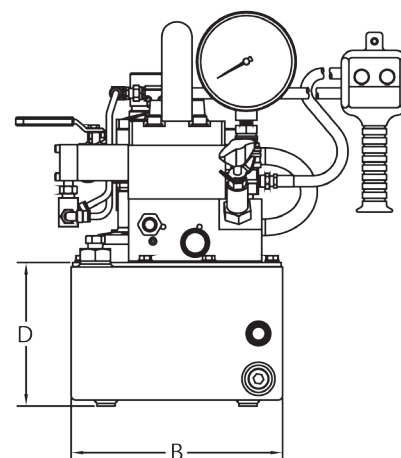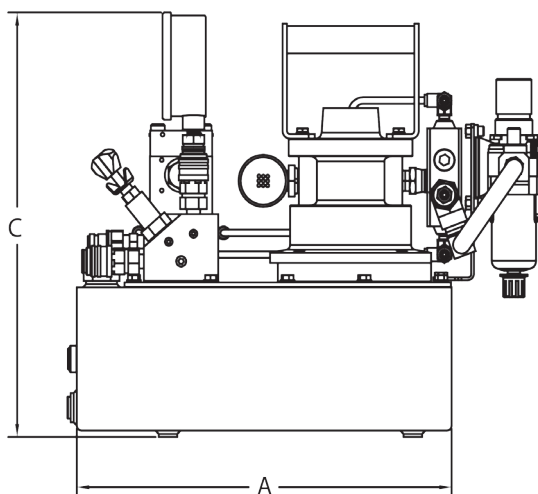

MADE IN AMERICA

U-TORQUE

www.u-torque.com